

Key Features

- 820 ~ 890 MHz, 50 Ohm Impedance
- 43.0 dBm P_{1dB}
- 34.5 dB Gain
- 1.2:1 VSWR
- 53.0 dBm Output IP₃
- 50% Power Added Efficiency
- Unconditional Stable
- Infinite Load VSWR Protection
- Single DC Power Supply
- Precision Machined Housing
- RoHS Compliant

Applications

- Cellular, GSM
- Mobile Infrastructures
- Fixed Wireless Communication


Additional heat sink is required for continuous operation!



Absolute Maximum Ratings

DC Power Supply Voltage	30 V
Drain Current, CW	2.5 A
Total Power Dissipation	70 W
RF Input Power, CW	20 dBm
Operating Temperature	-20 ~ +85 °C
Storage Temperature	-40 ~ +85 °C

Functional Block Diagram

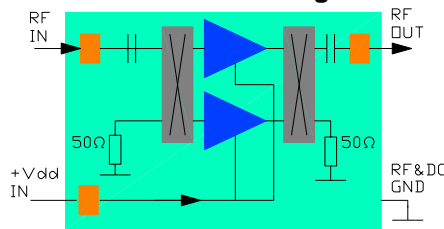

Ordering Information




Model	Connectors
WPA08-35B	SMA Female





Marking: WPA08-35B

Specifications (Tested at +25°C)

Item	Symbol	Test Constraints	Min	Nom	Max	Unit
Frequency Range	BW	50 Ohm Impedance	820		890	MHz
Small Signal Gain	S ₂₁	820 – 890 MHz	33.5	34.5	36.0	dB
Input VSWR	SWR ₁	820 – 890 MHz		1.2:1	1.4:1	Ratio
Output VSWR	SWR ₂	820 – 890 MHz		1.2:1	1.4:1	Ratio
Gain Flatness	ΔG	820 – 890 MHz		+/- 0.3	+/- 0.6	dB
Reverse Isolation	S ₁₂	820 – 890 MHz		55		dB
Noise Figure	NF	820 – 890 MHz		5.5		dB
Output Power 1dB Compression Point	P _{1dB}	820 – 890 MHz	42.5	43.5		dBm
Output-Third-Order Interception point	IP ₃	Two-Tone, P _{out} = 33 dBm each, 1 MHz separation	51	53		dBm
DC Power Added Efficiency	η	P _o = 20W	50	55		%
Current Consumption	I _{dd}	V _{dd} = +28 V, 0.325 A quiescent DC bias			2.5	A
Power Supply Operating Voltage	V _{dd}		+26		+30	V
Operating Temperature	T _o	Base plate	-20		+70	°C
Thermal Resistance	R _{th,c}	Junction to case			1.3	°C/W
Maximum CW RF Input Power	P _{IN, MAX}	DC – 6 GHz			20	dBm


Typical Performance

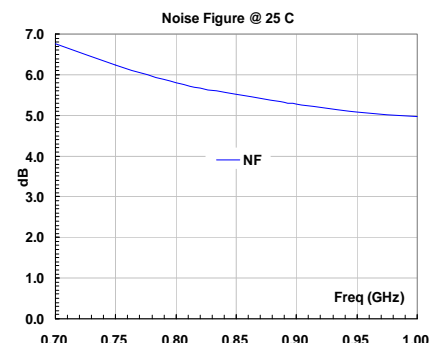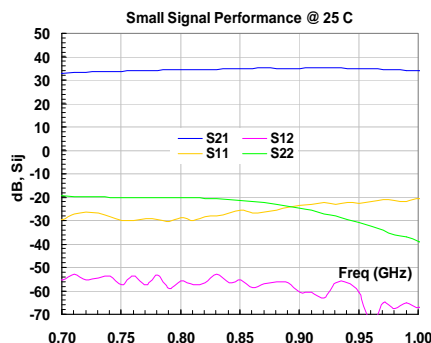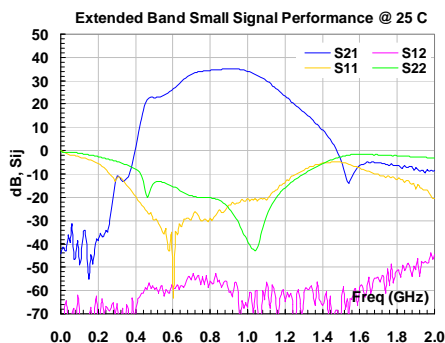

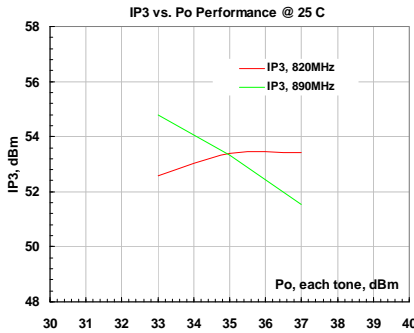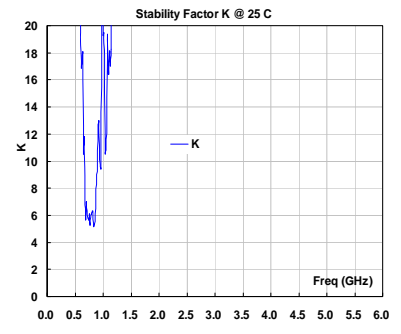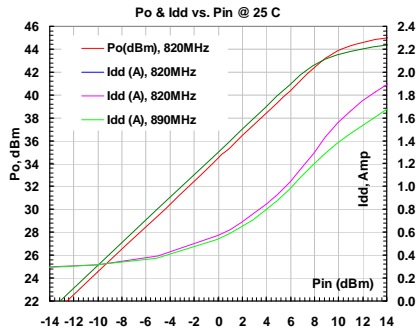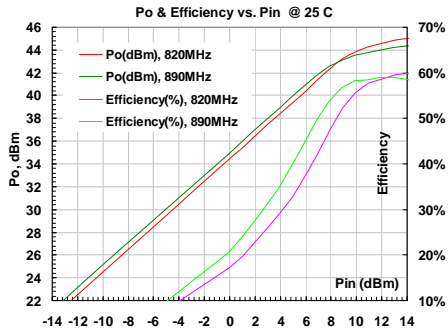

Outline, WP-1M Housing

- Units: INCH [mm]
- Body: Aluminum Alloy
- Finish: Clear Plating
- RF Connector: SMA F Stainless
- +28V DC I/O: Feedthru

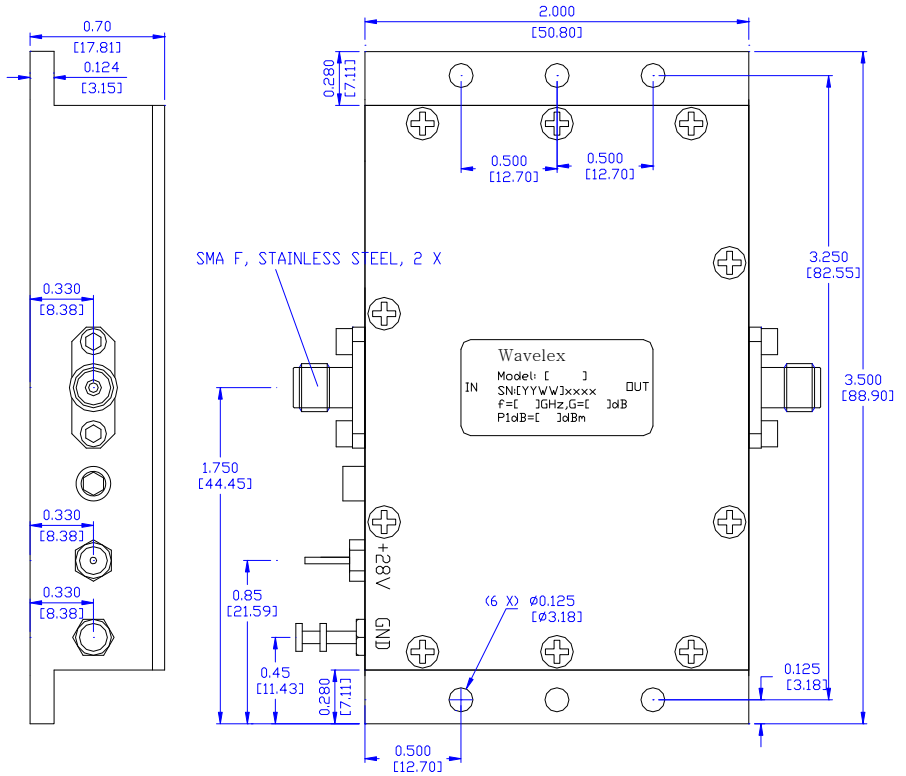

Application Notes:

A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the ideal torque wrench choice from Agilent Technology.

B. Mounting the Amplifier

Use six pieces of #4-40 with longer than 3/8" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them. Proper heat sink is required for continuous operation.